APT INTERNATIONAL

Fiche technique

B.04 4135 *08

23/11/2026

FRAISEUSES A MONTANT MOBILE & CNC

Huron High Precision EXN 30 (6 axis CNC)

Marque: Huron High Precision · Type: EXN 30 (6 axis CNC)



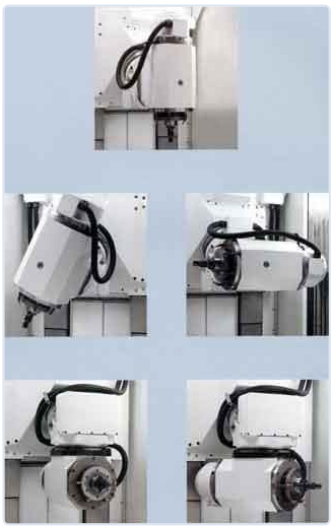







FRAISEUSES A MONTANT MOBILE & CNC

Course longitudinal axe X	**2400 mm**	Course transversal axe Y	**700 mm**
Course en hauteur axe Z	**800 mm**	Dimensions de la table	**1600 x 750 mm + 800x700 rot. table**
Puissance sur la broche principale	**25 kW**	Type de tête à fraiser	**Type N (2 ways indexing)**
Cône de broche	**ISO 40**	Universèle (2x360°)	**yes**
Nombre de vitesses max	**100-> 14000 rpm**	Commande	**Num 1060 PCNC**
Puissance nécessaire	**60 kW**	Longueur G -- D	**7260 mm**
Largeur Av -- Ar	**3900 mm**	Hauteur	**3520 mm**
Poids	**21000 kg**	Pompe d'arrosage	**yes**

DESCRIPTION

Bed milling machine Moving Pendling Column Milling machine is contineously 6 axes simultaneous! Heidenhain measuring Siemens motors and drives MP 15bar Tool-cooling With a rapid and powerfull spindle, the machine has a swarf removal higher than 800 cm³/minute in a steel at 700MPa The controlled head is simultaneously interpoled with the other axes to ensure 6 axis machining when the head is associated with a rotary table

CONTACT

Dam-Apt BV
De Tonne 77 · 9800 Deinze · Belgique
Tel: +32 (0)9 386 15 71 · info@aptint.com
www.aptint.com · TVA BE 0405.595.996

Scannez pour la fiche en ligne

(800x700 mm) The machine is equipped with an automatic tool changer with 32 housings which ensure a large autonomy. A & B axes contineously controlled C-axis movement (Rotation table): 360° continu Rapid traverse: 30 m/min Table dim: 1600 x 750 mm + 700 x 800 mm (divided in 2 fixed & 1 rotation (360°)table)

PRIX

Prix sur demande

Demander un devis

CONTACT

Dam-Apt BV

De Tonne 77 · 9800 Deinze · Belgique

Tel: +32 (0)9 386 15 71 · info@aptint.com

www.aptint.com · TVA BE 0405.595.996

Scannez pour la fiche en ligne